




Conventional cable ties 2



Colored cable ties 3



UV-proof cable ties 4



Heat proof cable tie 4




PA12 cable ties 5



Reusable cable ties 5




Reusable cable ties with pearls 6



Label-bearing cable ties 6



Pinned cable ties 7



Cable tie bases fixed with screws 7



Cable tie base, fixing with sticker, with four ways entry 8



Cable tie fixing plugs 9



Plastic cable/wire clamps with pin 10



Plastic pipe clip 10



Clips for tubes and cable-like wires 11



Wire fixing plug 11




Collar plugs 12



Plug with neck and hexagonal flanged screw 12



Extremely resistant Nylon plugs, for all building materials 13



Plug for drywall 13



Normal plug 14



Knock-in plug 14



Long plug 14



Collar plug 15



Self-stretching plug 15



Ceiling bolts 16



Wire thimble 16




Hook 17



U wire clips 17



Double wire clips 18



“AMAX” wire clips 18



Quick links 19



Turnbuckles 20



Cable tie spiral 21



Flexible and expandable cable sleeve 21

Pictograms of the table head



Length



Colour



Bounding diameter



Wire rope size



Plug



Plug+screw



Bore diameter



Load, tensile strength



Expansion range

Pictograms of the technical data



Material: Polyamide
6.6



Material: Polyethylene



Material: PET



Material:
Polypropylene



UV-proof



Melting point



Halogen-free



Ambient temperature



Operation temperature



Flammability
according to UL94



Rated diameter



Dielectric strength

Conventional cable ties




Pictograms

C/O

TRACON



80PR		81PR		75 × 2.2 mm	0.75-15 mm	35 N
120PR		121PR		98 × 2.5 mm	1-21 mm	45 N
130PR		131PR		135 × 2.6 mm	1-32 mm	45 N
150PR		151PR		140 × 3.6 mm	2-36 mm	80 N
160PR		161PR		160 × 2.6 mm	1-40 mm	45 N
180PR		181PR		180 × 7.8 mm	3.5-45 mm	250 N
200PR		201PR		200 × 2.6 mm	1-52 mm	45 N
170PR		171PR		200 × 3.6 mm	2-50 mm	80 N
190PR		191PR		200 × 4.8 mm	3-50 mm	110 N
250PR		251PR		250 × 4.8 mm	3-68 mm	110 N
280PR		281PR		280 × 8.0 mm	4-65 mm	180 N
230PR		231PR		290 × 3.6 mm	2-80 mm	80 N
210PR		211PR		290 × 4.8 mm	3.5-79 mm	110 N
300PR		301PR		300 × 7.8 mm	5-80 mm	250 N
220PR		221PR		360 × 4.8 mm	3.5-103 mm	110 N
260PR		261PR		365 × 7.8 mm	8-100 mm	250 N
370PR		371PR		370 × 3.6 mm	5-108 mm	80 N
430PR		431PR		430 × 4.8 mm	3.5-115 mm	110 N
450PR		451PR		450 × 7.8 mm	35-130 mm	250 N
530PR		531PR		550 × 8 mm	10-160 mm	250 N
540PR		541PR		540 × 7.8 mm	35-158 mm	250 N
760PR		761PR		780 × 9 mm	35-233 mm	350 N
850PR		851PR		850 × 12.6 mm	40-255 mm	450 N
1000PR		1001PR		1000 × 12.6 mm	40-302 mm	450 N

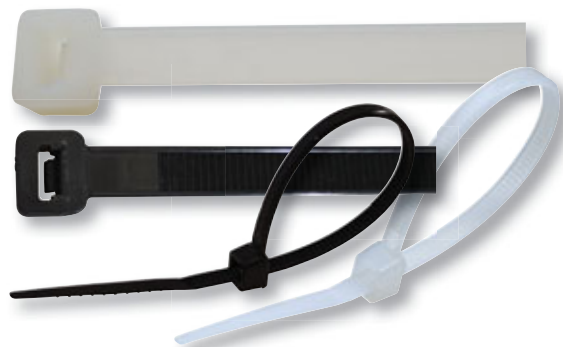

RELEVANT STANDARD
EN 62275



Completely resistant against:

Moderately resistant against:

Non resistant against:

hydrocarbons, alcohols and
some organic solvents
organic acids, lyes, reagents and
other organic materials
mineral acids and oxidizing
agents!

B/14

TG008

TG007


TG010




Colored cable ties

PA6.6

50 kV/mm

Ta
-40...+85°CV2
UL94NO
Halogen

TRACON				
120K	98 × 2.5 mm	1-21 mm	45 N	
150P	140 × 3.6 mm	2-36 mm	80 N	
150Z	140 × 3.6 mm	2-36 mm	80 N	
200K	200 × 2.6 mm	1-52 mm	45 N	
170K	200 × 3.6 mm	2-50 mm	80 N	
170P	200 × 3.6 mm	2-50 mm	80 N	
190K	200 × 4.8 mm	3-50 mm	110 N	
230NZ	290 × 3.6 mm	2-80 mm	80 N	

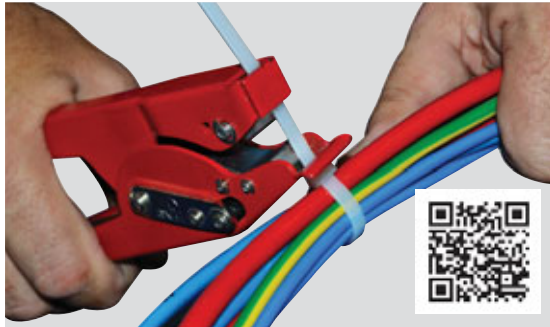


RELEVANT STANDARD
EN 62275



Cable ties with metal blade

PA6.6

50 kV/mm

Ta
-40...+85°CV2
UL94NO
Halogen

TRACON			
T92	92 × 2.4 mm	2-16 mm	35 N
T140	140 × 3.6 mm	2-29 mm	75 N
T186	186 × 4.8 mm	3.5-45 mm	110 N
T200	200 × 2.4 mm	2-50 mm	35 N
T208	208 × 3.6 mm	2-50 mm	75 N
T281	281 × 3.6 mm	2-76 mm	75 N
T293	293 × 4.8 mm	3.5-78 mm	110 N
T338	338 × 7.6 mm	3.5-120 mm	110 N
T360	360 × 4.8 mm	3.5-102 mm	110 N



UV-proof cable ties




C/O


TRACON				
TU92		92 × 2.4 mm	2-16 mm	35 N
TU140		140 × 3.6 mm	2-29 mm	75 N
TU186		186 × 4.8 mm	3.5-45 mm	110 N
TU200		200 × 2.4 mm	2-50 mm	35 N
TU208		208 × 3.6 mm	2-50 mm	75 N
TU281		281 × 3.6 mm	2-76 mm	75 N
TU293		293 × 4.8 mm	3.5-78 mm	110 N
TU338		338 × 7.6 mm	3.5-120 mm	110 N
TU360		360 × 4.8 mm	3.5-102 mm	110 N



Heat proof cable tie



TRACON				
260T		365 × 7.8 mm	8-100 mm	135 °C (5-8 min) 250 N

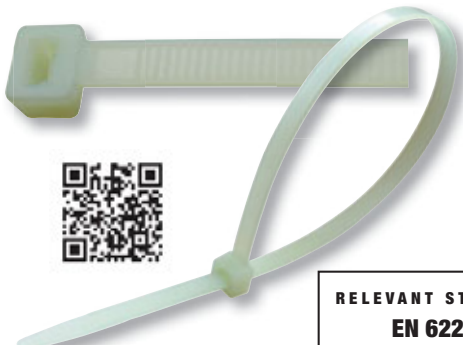

RELEVANT STANDARD
EN 62275





SCAN THE QR CODE!


- Check our new products
- Be updated

Our range of products is continuously and quickly expanding. Our catalogue shows our products as of April 2019. Check our website to stay up-to-date.

PA12 cable ties





TRACON				
115-12		115 × 6.0 mm	4-25 mm	120 N
132-12		132 × 9.0 mm	4-27 mm	120 N
180-12		180 × 9.0 mm	5-45 mm	150 N
265-12		260 × 9.0 mm	25-65 mm	250 N
300-12		300 × 9.0 mm	25-80 mm	225 N
360-12		350 × 9.0 mm	25-93 mm	250 N

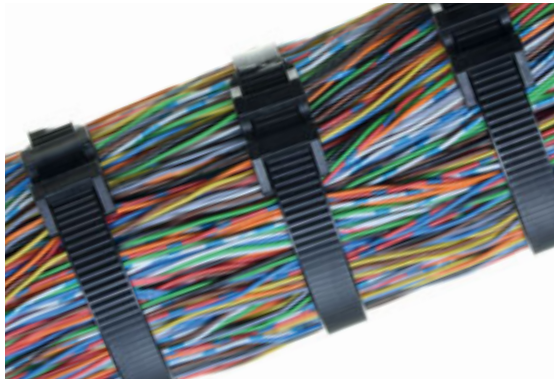

RELEVANT STANDARD
EN 62275




Reusable cable ties




TRACON				
180-NY 	181-NY 	200 × 7.5 mm	10-50 mm	10-45 N
260-NY 	261-NY 	250 × 7.5 mm	10-65 mm	10-45 N
280-NY 	281-NY 	300 × 7.5 mm	10-70 mm	10-45 N
350-NY 	351-NY 	350 × 8 mm	10-120 mm	10-45 N



RELEVANT STANDARD
EN 62275

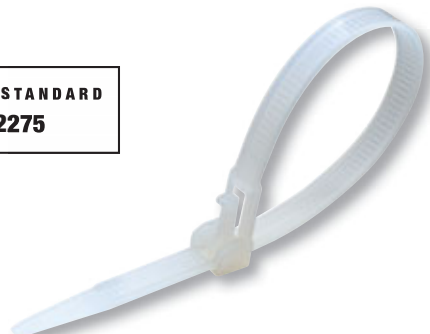

Reusable cable ties with pearls




TRACON		L × S (mm)	d (mm)	D (mm)	I (mm)		
120N-GY		120 × 1.3	2.5	5.5	3	6-25 mm	40 N
150N-GY		150 × 2	3	7.5	4.5	8-35 mm	40 N
180N-GY		180 × 2	3	7.5	4.5	8-45 mm	40 N




RELEVANT STANDARD
EN 62275




Label-bearing cable ties





TRACON	L × S (mm)	a (mm)	b (mm)		
190J	190 × 3.6	27	13	10-48 mm	70 N
120J	110 × 2.5	8	25	1-20 mm	40 N
200J	210 × 2.5	15	30	5-45 mm	40 N

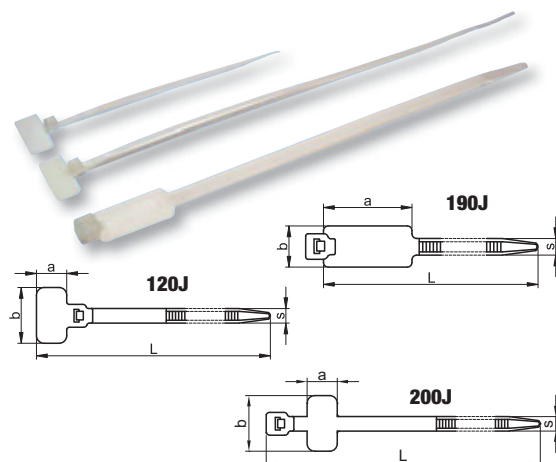

Pinned cable ties




TRACON				
BK-130	130 × 4.8 mm	d=6 mm	3-25 mm	200 N

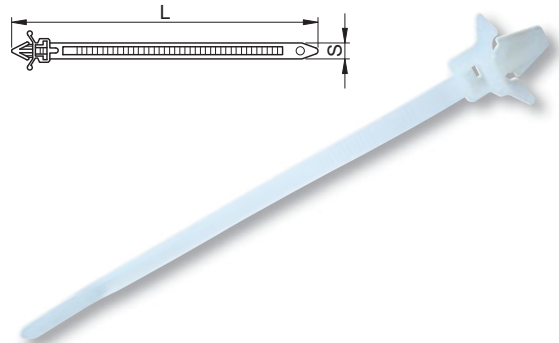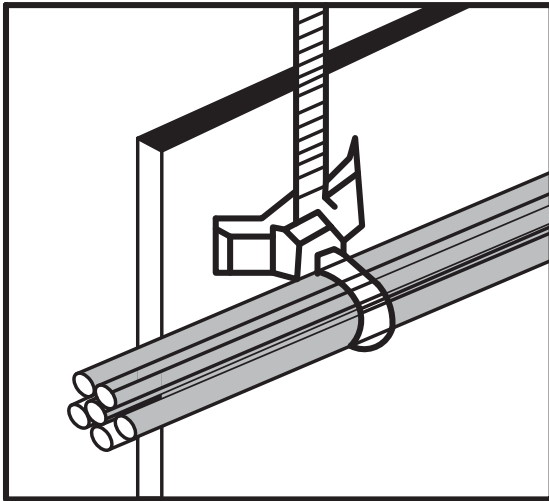





RELEVANT STANDARD
EN 62275



Cable tie bases fixed with screws



TRACON	a (mm)	b (mm)	L (mm)	d (mm)	D (mm)
CSTALP	15	10	5.1	3.5	7
CSTALP-3	12.8	7	4	3.3	5.8
CSTALP-2	23	16	9	6.3	9.8

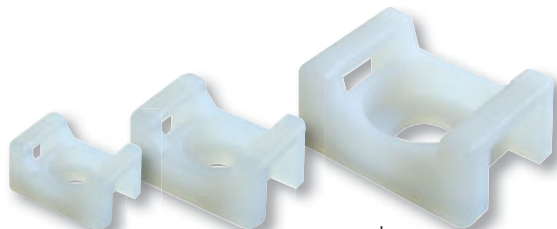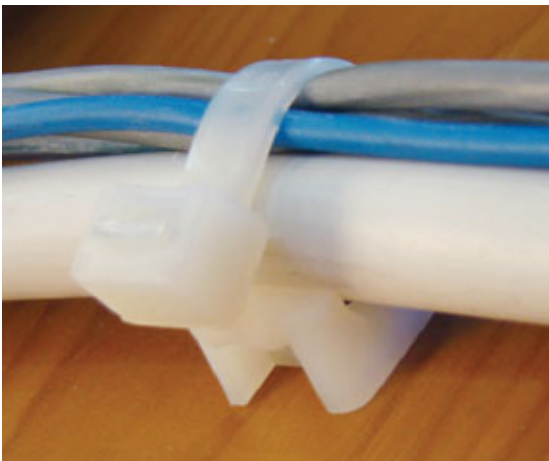



Cable tie base, fixing with sticker, with two ways entry



Pictograms

C/O

TRACON		a (mm)	b (mm)	L (mm)	d (mm)	D (mm)
TALP190-2		18.7	18.7	4	4.4	5.7
TALP191-2		18.7	18.7	4	4.4	5.7
TALP270-2		26.5	26.5	5.8	4.3	8.1
TALP271-2		26.5	26.5	5.8	4.3	8.1

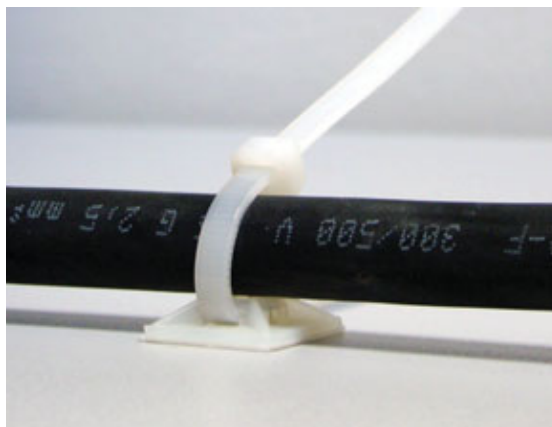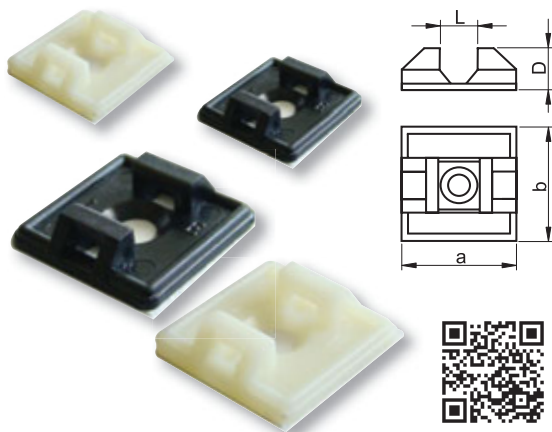


Cable tie base, fixing with sticker, with four ways entry




Pictograms

C/O



TRACON		a (mm)	b (mm)	L (mm)	d (mm)	D (mm)
TALP190		20	20	5	2.9	6.1
TALP191		20	20	5	2.9	6.1
TALP270		25	25	6.2	3.5	7.5
TALP271		25	25	6.2	3.5	7.5

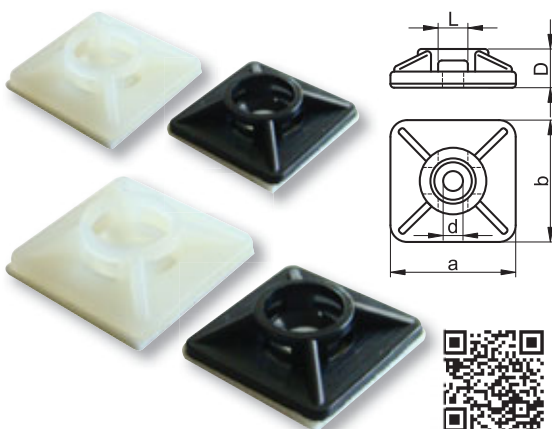


Cable tie fixing plugs



TRACON			a (mm)	b (mm)	c (mm)	W ₁ (mm)	W ₂ (mm)	L (mm)	D (mm)	
5458			8 mm	10.6	6.3	3.1	12.8	12.6	43.8	9.9
5458N			8 mm	6.4	6.5	2.2	9.8	9.2	35.7	7.7

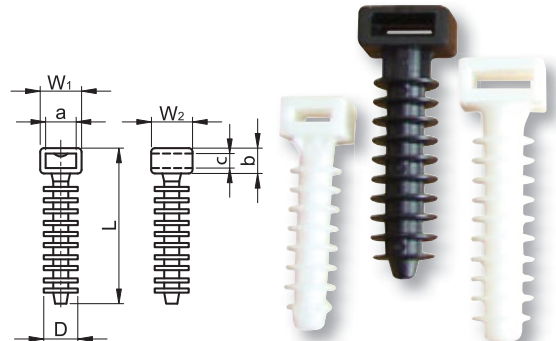
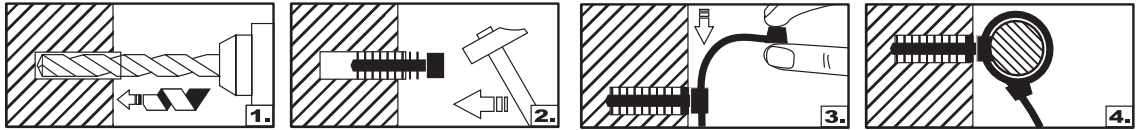


Knock-in plugs and suitable cable ties





TRACON				A (mm)	B (mm)	D (mm)		
TBK-3		RAL 7035	180 × 7.5 mm	16-32 mm	17.6	24.5	5.9	150 N
TBK-4		RAL 7035	280 × 7.5 mm	40-63 mm	17.6	40.5	5.9	150 N

TRACON		
TBKT		6-7 mm

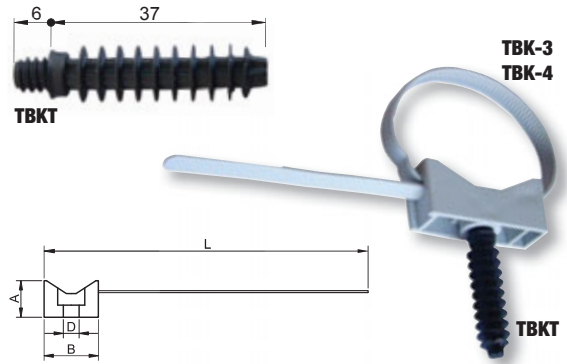

Plastic cable/wire clamps with pin

TRACON			a (mm)	b (mm)
100 pcs	20 pcs			
				
NOF	NOF-20		2.5	4.5
N1	N1-20		6	7.3
N2	N2-20		8	8.1
N3	N3-20		9	8.3
N4	N4-20		11	10






Plastic pipe clip



Pictograms

C/O

TRACON			D (mm)	W (mm)	L (mm)	H (mm)	
CSS-16			16	29.3	12.9	21.7	3/8" (coll)
CSS-20			20	33	12.9	24.2	1/2" (coll)
CSS-25			25	37.5	12.9	27.9	3/4" (coll)

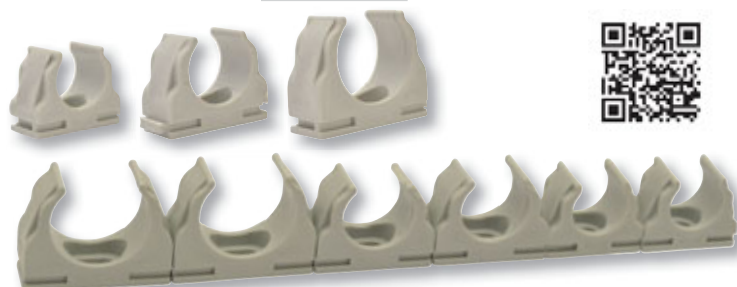



Clips for tubes and cables



Pictograms

C/O

TRACON			d (mm)	W (mm)	L (mm)
TKCR-0708			7-8	20	25



Lockable cable and tube clips




TRACON		d (mm)	L (mm)	H (mm)
TKCRZ-12		12	28	24.5
TKCRZ-15		15	28	28.5
TKCRZ-18		18	28	33
TKCRZ-20		20	28	34
TKCRZ-22		22	34	37
TKCRZ-28		28	38,5	45
TKCRZ-32		32	38	47.5
TKCRZ-35		35	41	49




Clips for tubes and cable-like wires




TRACON		a (mm)	b (mm)	L (mm)	I (mm)	H (mm)	W (mm)
BCSV-3		10-18	18.6	26.4	16.2	19.8-37.5	17.7
BCSV-4		19-31	28.8	39.4	15.1	39.5-51.6	18.2



Wire fixing plug



TRACON		d ₁ (mm)	d ₂ (mm)	B (mm)	L (mm)
KRT		6	6	10	36.5
KRT8		8	7.7	12.2	42.7



Collar plugs




V2
UL94



Pictograms

C/O

TRACON		D × L (mm)	d (mm)	l ₁ (mm)	l ₂ (mm)	B (mm)
T6H		6 × 30	3.3	37	24.2	15.4
T6K		6 × 30	3.3	38.5	10	13.4




Plug with neck and hexagonal flanged screw



V2
UL94



TRACON	D × L (mm)	d × l (mm)
T10080P	10 × 80	6.8 × 95
T10100P	10 × 100	6.8 × 115
T10120P	10 × 120	6.8 × 135
T10140P	10 × 140	6.8 × 155
T10160P	10 × 160	6.8 × 175
T10200P	10 × 200	6.8 × 215
T10240P	10 × 240	6.8 × 255
T10300P	10 × 300	6.8 × 315

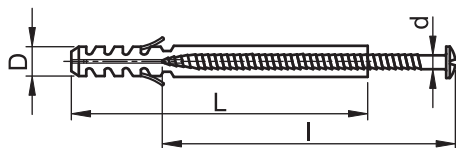


High endurance universal plug



TRACON	D × L (mm)	d × l (mm)*
 T5-UNI	5 × 25	3.5 × 35
 T6-UNI	6 × 30	4 × 40
 T8-UNI	8 × 40	5 × 50
 T10-UNI	10 × 50	6 × 60

* Recommended screw size

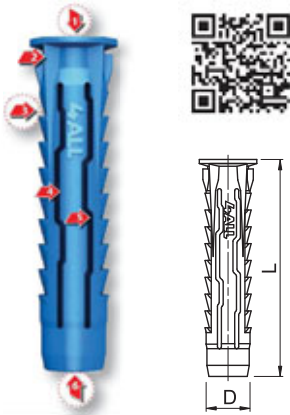

Special interior space for best seat of the bolt.


The ears sit fast in all -even soft- materials preventing the plug to turn.

The toothing behind the head ensures safe fixation in any material.

The expansion part enhances the fixation in the hollow areas of the material.

The opening in four directions makes the plug adapted to walls of any material.


The reinforced tip of the plug ensures proper position of the bolt at installation.



Concrete



Perforated brick






Building plate

Plug for drywall




TRACON	Description	D × L (mm)	d × l (mm)*
 GBT	Self-drill plug for drywalls	16 × 36	4 × 35
 GSZT	Plug for drywalls with wings	10 × 55	4 × 50

* Recommended screw size

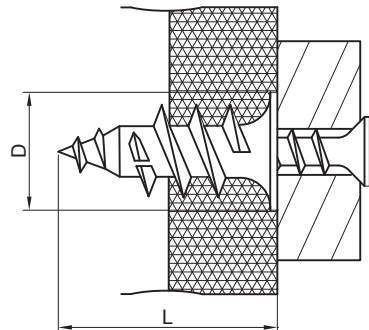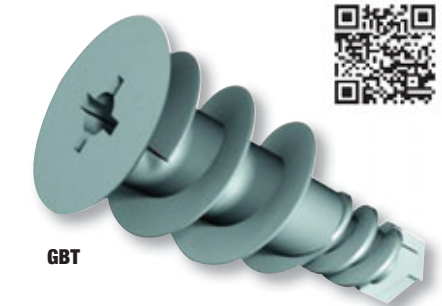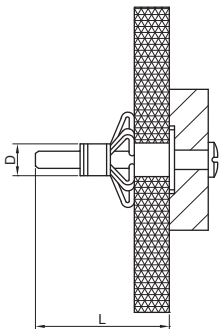

Square-section plug



Pictograms


C/O



TRACON		D × L (mm)	d × l (mm)
TN6	TNCS6	6 × 23	2.6 × 30
TN8	TNCS8	8 × 34	3.5 × 38
TN10	TNCS10	10 × 42	4.4 × 46
TN12	TNCS12	12 × 52	5.4 × 61
TN14	–	14 × 65	–




Knock-in plug



TRACON		D × L (mm)	d × l (mm)	TRACON		D × L (mm)	d × l (mm)
TB525		5 × 25	3.5 × 29	TB845		8 × 45	4.9 × 48
TB535		5 × 30	3.5 × 38	TB860		8 × 60	4.4 × 60
TB545		5 × 50	3.5 × 47	TB875		8 × 80	4.7 × 78
TB635		6 × 35	3.7 × 39	TB8100		8 × 100	4.7 × 102
TB645		6 × 40	3.7 × 48	TB8120		8 × 120	4.4 × 122
TB655		6 × 55	3.7 × 58	TB8135		8 × 135	4.4 × 137
TB670		6 × 60	3.7 × 73				




Long plug



TRACON		D × L (mm)	d × l (mm)
–	THC8100	8 × 100	5.3 × 104
TH8100	THC8120	8 × 120	5.5 × 126
TH8120	THC8135	8 × 135	5.4 × 134
TH1080	THC1080	10 × 80	6.8 × 85
TH10100	THC10100	10 × 100	6.8 × 105
TH10115	THC10115	10 × 115	6.8 × 119
TH10135	THC10135	10 × 135	6.8 × 141
TH10160	THC10160	10 × 160	7 × 165



Normal plug


V2
UL94


TRACON


		D × L (mm)	d × l (mm)
T6-PA	T6CS-PA	6 × 30	4 × 40
T8-PA	T8CS-PA	8 × 40	5 × 50
T10-PA	T10CS-PA	10 × 50	5.5 × 60
T12-PA	–	12 × 60	–
T14-PA	–	14 × 75	–



Pictograms

C/0

Collar plug



V2
UL94


TRACON

		D × L (mm)	d × l (mm)
–	T6PCS-PA	6 × 30	4 × 40
T8P-PA	T8PCS-PA	8 × 40	5 × 50
T10P-PA	T10PCSPA	10 × 50	5.5 × 60
T12P-PA	–	12 × 60	–



Self-stretching plug


V2
UL94


TRACON

		D × L (mm)	d × l (mm)
TOP6	TOPCS6	6 × 40	4 × 50
TOP8	TOPCS8	8 × 50	5 × 60
TOP10	TOPCS10	10 × 60	6 × 70




SCAN THE QR CODE!

- Check our new products
- Be updated





Our range of products is continuously and quickly expanding. Our catalogue shows our products as of April 2019. Check our website to stay up-to-date.

Ceiling bolts

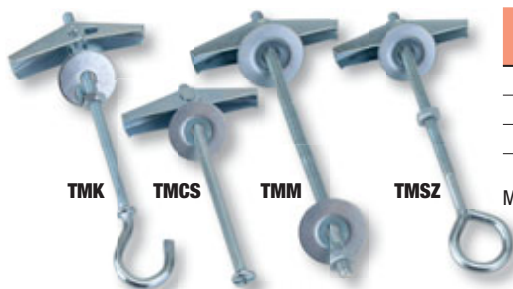

TRACON	d (mm)	L (mm)	a (mm)	B (mm)	
TMK	M4	95	20	14	200 N
TMCS	M4	81	20	–	800 N
TMM	M4	100	20	–	800 N
TMSZ	M4	93	20	14	200 N



Material: steel, chromed



Wire thimble

TRACON	W (mm)	l (mm)	L (mm)	c (mm)	s (mm)	
SZIV-3	4.5	41.6	46.3	17	1	1 – 3 mm
SZIV-4	5.5	37.7	41.7	15	1	3 – 4 mm
SZIV-5	6.2	37.8	42.4	15	1	4 – 5 mm
SZIV-6	9	42.8	47.5	18.1	1	5 – 6 mm
SZIV-8	9.4	47.7	54.5	19.2	1.5	6 – 7 mm
SZIV-10	12.1	53.8	59.7	21.9	1.5	7 – 9 mm
SZIV-12	17.1	62.4	68.5	28.8	1.5	9 – 12 mm
SZIV-16	21.1	75.7	82.9	39.2	2	12 – 14 mm
SZIV-19	21.6	80.6	90.3	42.2	2.3	16 – 19 mm

Material: steel

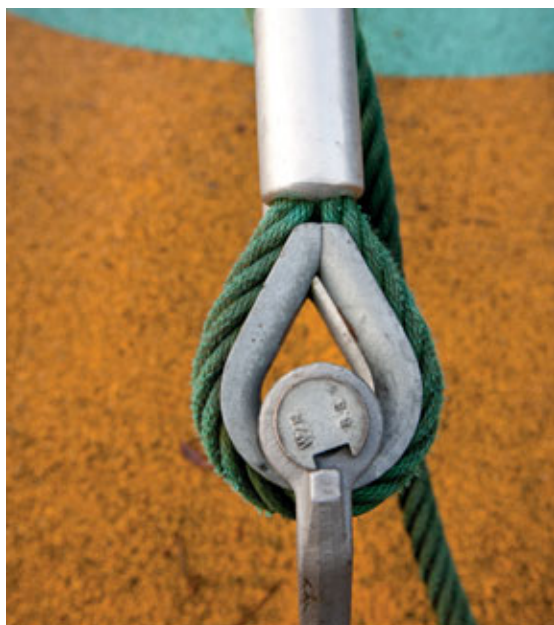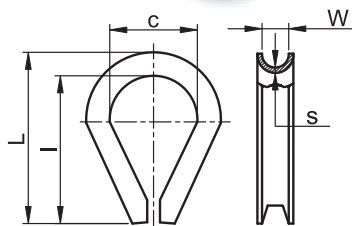

Hook


TRACON	d (mm)	L (mm)	l (mm)	m (mm)	D (mm)	
HR3-25	3	26	20.2	3	7	320 N
HR3-30	3	31.1	25.5	4.8	8.8	320 N
HR4-30	4	33.4	25.5	4.8	10	575 N
HR4-35	4	35.3	27.5	5.2	10.2	575 N
HR4-40	4	41	33.3	5.9	10.9	575 N
HR5-45	4.8	46	36.7	6.6	12.5	730 N
HR5-50	5	53.5	44	10.3	15.3	885 N
HR6-80	6	80	69	12	24	1250 N
HR8-100	8	104	88	17	31	2000 N

Material: steel



Pictograms


C/O



U wire clips

TRACON	d (mm)	D (mm)	W (mm)	H (mm)	h (mm)	L (mm)	 mm
U03	M4	5.4	9.5	20.4	7.3	18	2-3 mm
U05	M5	7.2	9.6	24.2	7.5	21.5	3.2-5 mm
U06	M5	8.0	11.2	24.2	9.5	23.8	4.5-7 mm
U08	M6	9	12.9	35.4	10.4	27.4	6.3-8 mm
U09	M8	10.5	16.6	37.3	12.7	33	8-9 mm
U11	M8	11	18.4	41	16	36.4	10-11 mm
U13	M10	14.8	20.6	54.7	18.7	42.2	12-14 mm
U14	M10	14.9	24.2	55.2	23	43.7	12-14 mm
U16	M10	18.2	26	62	25.2	49.9	14-16 mm
U19	M12	21.5	29.7	76.8	30.2	54.4	16-19 mm
U22	M12	21.5	31	77.8	33.2	56.7	19-22 mm
U25	M14	27.7	32.8	95.7	34.5	63.3	22-25 mm


Material: pressing screw – steel, body – tempered casting



Simple wire clips

TRACON	d (mm)	b (mm)	B (mm)	H (mm)	L (mm)	k (mm)
BSZ1-2	M4	5.1	13.6	6.1	17.2	13
BSZ1-3	M4	6.4	15.3	7	18.4	13.6
BSZ1-4	M5	10	16.6	6.5	21	17.4
BSZ1-5	M5	10.4	18.7	8.9	24.4	16.9
BSZ1-6	M6	12.5	23.3	9.6	30.2	21.6
BSZ1-8	M8	18.6	30.4	13.5	36.5	29.2


Material: steel

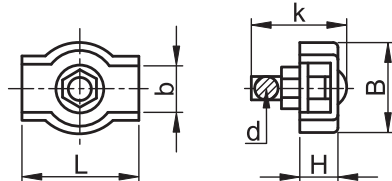

Double wire clips

TRACON	d (mm)	b (mm)	B (mm)	H (mm)	L (mm)	k (mm)
BSZ2-2	M4	5.8	12.9	5	36.6	13.4
BSZ2-3	M4	6.4	15.3	6.7	35.2	13.5
BSZ2-4	M5	8.4	17.5	7.1	40	17.6
BSZ2-5	M5	11.9	20.4	8.8	48.8	19.6
BSZ2-6	M6	12.5	23.3	9.6	60.5	21.6
BSZ2-8	M8	18.6	30.4	13.5	73	29.2


Material: steel

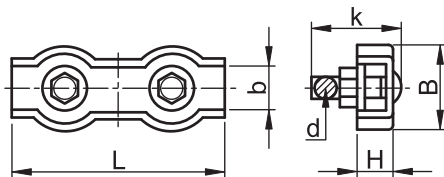

“AMAX” wire clips

TRACON	d (mm)	W (mm)	H (mm)	L (mm)	k (mm)	
AMAX3	M3	16.1	10.2	28.6	12.7	3 mm (1/8")
AMAX5	M5	17.5	10.7	30.5	12.4	5 mm (3/16")
AMAX6	M6	22.9	12.9	34.9	15.9	6 mm (1/4")

Material: steel




Pictograms

C/O

Spring hooks

TRACON	d (mm)	D (mm)	W (mm)	L (mm)	m (mm)	←  →
RKARA4	4.5	5.8	21.1	42.0	5.5	300 N
RKARA5	5	6.6	26	51.3	7.2	500 N
RKARA6	6	6.9	30.2	62.3	7.7	800 N
RKARA7	7	7.8	35.1	70.7	8.7	1100 N
RKARA8	8	8.1	40.4	80.5	10.2	1400 N
RKARA9	9	9.7	45	90.3	11.7	1700 N
RKARA10	10	11.1	47.3	99.8	13.4	2100 N
RKARA11	11	12.3	57.3	121.2	16.5	2500 N
RKARA12	12	13.9	63.2	142.5	20.8	2700 N
RKARA13	13	15.8	72.8	149.4	24.1	3000 N


Material: steel



Quick links


TRACON	d (mm)	D (mm)	W (mm)	L (mm)	←  →
CSKARA3,5	3.5	10.8	17.9	35.5	420 N
CSKARA4	4	11.6	19.7	40.6	850 N
CSKARA5	5	13.6	23.5	50.9	1270 N
CSKARA6	6	14.7	26.7	58.3	1700 N
CSKARA7	7	18.4	32	68.2	2550 N
CSKARA8	8	19.6	36	73.8	3100 N
CSKARA9	9	20.6	39.2	82.2	4250 N
CSKARA10	10	21.6	42.4	89.6	5100 N
CSKARA12	12	23.5	48.3	106.2	6400 N

Material: steel



Turnbuckles

TRACON			d (mm)	l (mm)	L (mm)	d (mm)	
							
FSS550	FSH550	FHH550	5	50	92.6	7.8	750 N
FSS570	FSH570	FHH570	5	70	113	8	770 N
FSS660	FSH660	FHH660	6	60	112	10	1050 N
FSS6100	FSH6100	FHH6100	6	100	154	10.2	1800 N
FSS870	FSH870	FHH870	8	70	137	12.3	1200 N
FSS8110	FSH8110	FHH8110	8	110	176	12.3	2000 N
FSS10120	FSH10120	FHH10120	10	120	194	13.3	3000 N
FSS12130	FSH12130	FHH12130	12	130	224	18.3	4450 N
FSS16140	FSH16140	FHH16140	16	140	265	22	5950 N




SCAN THE QR CODE!


- Check our new products
- Be updated

Our range of products is continuously and quickly expanding. Our catalogue shows our products as of April 2019. Check our website to stay up-to-date.


Cable tie spiral





TRACON	d (mm)	D (mm)	s (mm)		
SPI6	6.2	8.6	1.9	1 m	6 mm
SPI8	8	10.9	2.4	1 m	8 mm
SPI10	10	13.2	2.9	1 m	10 mm
SPI12	12	15.4	2.9	1 m	12 mm
SPI15	15	17.1	2.9	1 m	15 mm
SPI20	20	24	3	1 m	20 mm
SPI25	25	28.7	3	1 m	25 mm




Cable tie tape spiral



TRACON		D (mm)	d (mm)	W (mm)		
KSPI-4N	KSPI-4F	4.5	3.2	6.8	10 m	4...20 mm
KSPI-6N	KSPI-6F	6.9	5.3	10.3	10 m	7...40 mm
KSPI-8N	KSPI-8F	8.4	6.6	11.7	10 m	12...50 mm
KSPI-10N	KSPI-10F	10.2	8.2	13.4	10 m	13...70 mm
KSPI-12N	KSPI-12F	12.2	9.6	15.9	10 m	15...80 mm
KSPI-16N	KSPI-16F	15.7	12.4	21.6	10 m	20...120 mm



Flexible and expandable cable sleeve



TRACON		
TKH-003	3 mm	2.4 – 6.4 mm
TKH-010	10 mm	4.8 – 15.9 mm
TKH-016	16 mm	9.5 – 25.4 mm
TKH-025	25 mm	15.9 – 36.1 mm
TKH-032	32 mm	19.1 – 44.5 mm

In addition to a mechanical protection, these cable sleeves fit the cable and adapt themselves to the different diameters. The sleeves can be tailored with a special iron edge or a hot knife to avoid curling and damages. The woven structure does not retain heat and humidity.

